

## DSBI

### DSBI SERIES DOUBLE SHEAR BEAM STAINLESS STEEL LOAD CELLS



Stainless steel double shear beam load cells suitable for building, for example, to make CE-M approved scales for high capacities or for weighing tanks and hoppers with the relevant accessories. High accuracy also with the expansion of the weighing structures.

---

CAPACITIES (kg): 10000, 20000, 30000.

---

17-4 PH stainless steel. IP68 protection. C4 precision class.

---

Working in cooperation with:

**VAHY PRO S.R.O.**

FUGNEROVA 345 - 40004 - TRMICE  
Tel. 0042-0475620800 Fax. 0042-0475620800  
vahypro@vahypro.cz

The best solution  
for advanced industrial  
applications

## TECHNICAL FEATURES

- C4 PRECISION CLASS
- 17-4 PH STAINLESS STEEL CONSTRUCTION
- IP68 PROTECTION
- MAX. CAPACITIES FROM 10000 TO 30000 kg
- SHIELDED CONNECTION CABLE
- TEST CERTIFICATE AVAILABLE UPON REQUEST


## MAIN FEATURES

- Minimum load cell verification interval:  $V_{min} = E_{Max} / 10.000$
- Combined error 0,03% of Full Scale Output (F.S.)
- Full Scale Output: 2mV/V +/- 0,1%
- Temperature effect on zero: 0,00116% /°C
- Temperature effect on full scale output: 0,00097% /°C
- Compensated Temperature Range: -10°C/+40°C
- Operating Temperature Range: -30°C/+85°C
- Creep error after 30 minutes: <0,02% F.S.
- Maximum tolerated excitation voltage: 15 VDC
- Input Resistance:  $700 \pm 7 \text{ Ohm}$
- Output Resistance:  $700 \pm 7 \text{ Ohm}$
- Zero Balance: +/- 1% F.S.
- Insulation Resistance: >5000 MOhm
- Safe Overload: 150% F.S.
- Ultimate Overload: 300% F.S.
- 6-wire shielded cable, 15m long

## ATEX VERSION

- The CCATEX certificate makes the load cell suitable for use in hazardous areas with protection methods according to:  
ATEX II 1G Ex ia IIC T6 (Ta -20÷+40°C) TX (Ta -20÷+65°C) Ga  
ATEX II 1D Ex ta IIIC TX°C (Ta -20÷+40°C) TX°C (Ta -20÷+65°C) Da IP65.  
The certificate includes the manual and the ATEX CE conformity declaration (available in EN, DE, FR, and IT).
- **IMPORTANT:** the certificate refers to the single load cell. For systems with more load cells, it is necessary to order one certificate for each load cell.

## DETAIL 1

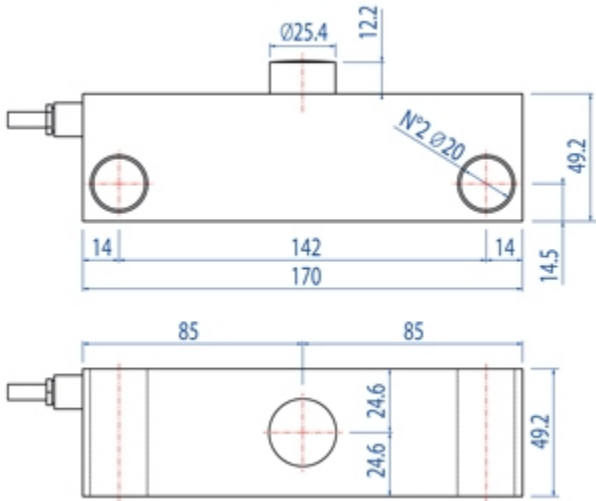

dimensions in mm

Wiring Code	
<i>Colour</i>	<i>Function</i>
GREEN	OUTPUT +
PURPLE	SENSE +
RED	INPUT +
WHITE	OUTPUT -
BLACK	INPUT -
GREY	SENSE -

## VERSIONS

Models available

Code	Max (kg)	Masterpack 4 pcs
DSBI10	10000	DSBI10C
DSBI20	20000	DSBI20C
DSBI30	30000	DSBI30C



[www.diniargeo.com](http://www.diniargeo.com)



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

**DINI ARGEO**  
**FRANCE sarl**  
Nogent-sur-Marne

**DINI ARGEO**  
**GMBH**  
Sinsheim - Germany

**DINI ARGEO**  
**UK Ltd**  
Taunton - United Kingdom

**DINI ARGEO WEIGHING**  
**INSTRUMENTS Ltd**  
Shanghai - China

**DINI ARGEO**  
**WEIGHBRIDGES**  
Calto (RO) – Italy



**HEAD OFFICE**  
Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena - Italy



**VAHY PRO S.R.O.**

FUGNEROVA 345 - 40004 - TRMICE

Tel. 0042-0475620800 Fax. 0042-0475620800

[vahypro@vahypro.cz](mailto:vahypro@vahypro.cz)

**SALES AND TECHNICAL ASSISTANCE SERVICE**